

HPC | Compressed
Air Systems

Rotary Screw Compressors **SXC »Compact« Series**

With the world-renowned SIGMA PROFILE 

Free air delivery 0.26 to 0.80 m³/min, Pressure 8 – 11 – 15 bar



SXC Series

The compact integrated air system

SXC – integrated compressed air packages with minimal space requirement: The turnkey SXC rotary screw compressor range from Kaeser Kompressoren combines exceptional efficiency and cost-effective performance with super-quiet compressed air production, treatment and storage. Under the SXC's double-skinned rotomoulded polyethylene enclosure hides a complete compressed air supply system. The perfect choice for workshops and smaller production facilities, these advanced compressor systems combine exceptional efficiency, ease of maintenance, durability and perfectly matched components to ensure years of dependable, efficient performance.

Efficiency as standard

Every SXC compact compressed air package features a rotary screw compressor airend equipped with high-efficiency SIGMA profile rotors to ensure more air and more savings.

Versatile and compact

With available drive powers from 2.2 to 5.5 kW, you'll always find the right model to meet your specific needs. Belying their impressive performance, the four SXC models measure only 61.5 cm wide and have a compact footprint of only 0.62 square metres.


Optimum performance

Featuring energy-saving start-stop control, the "Sigma Control basic" compressor control system ensures that SXC all-in-one packages operate at the peak of their performance.

Clean and quiet

With a maximum sound level of 69 dB(A), SXC integrated packages are exceptionally quiet. Equipped with an integrated refrigeration dryer, they deliver dry, clean compressed air at all times. The electronically-controlled condensate drain reliably removes condensate from the air receiver and refrigeration dryer without energy loss.

Energy cost savings through system optimisation

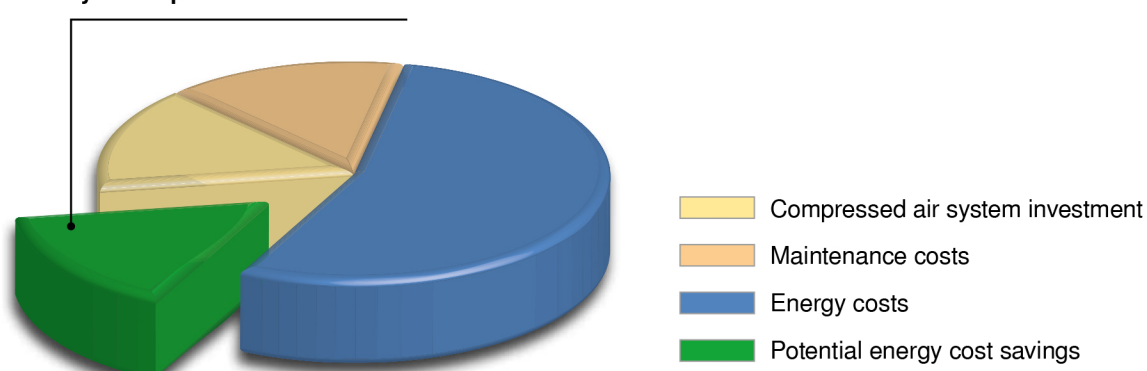

The all-in-one compact compressed air package

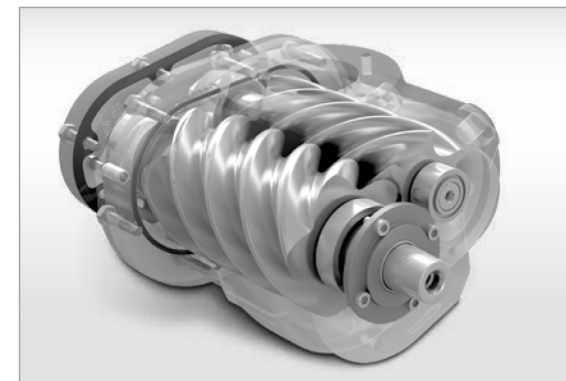


Fig.: SXC 4



SXC Series

**KAESER quality
in every detail**



Energy saving Sigma Profile

Each Kaeser rotary screw airend uses Sigma Profile rotors, specially developed by Kaeser, that consume approximately 10-20 % less energy than conventional rotors with the same air delivery capacity. This makes a significant contribution to impressive overall efficiency.




Maintenance friendly

All maintenance and service points are easily accessible once the SXC's removable enclosure is effortlessly lifted away. The electronic condensate drain can be inspected via a grille. Needless to say, the SXC is designed for maximum ease of maintenance.



The Sigma Control basic

With its efficient start-stop control, the "Sigma Control basic" ensures optimised compressed air system performance at all times and constantly monitors the entire SXC package.

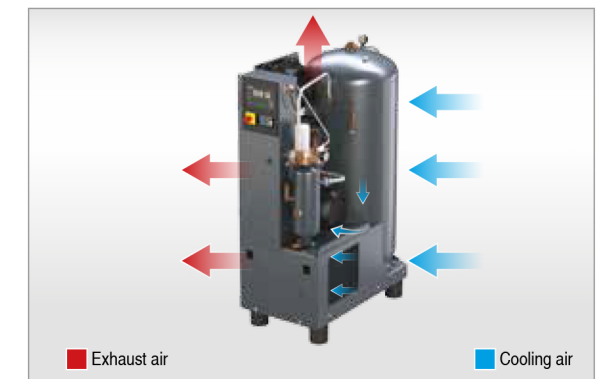

Efficient cooling

Kaeser compressors are renowned for their innovative cooling systems and SXC packages are no exception: Three fans are installed to ensure optimum cooling. A dedicated fan with independent drive motor provides dependable fluid cooling.

Equipment

Complete unit

Ready for operation, fully automatic, super-silenced, vibration damped, double-walled roto-moulded polyethylene enclosure.

Sound insulation

Soundproof enclosure, anti-vibration mounts, double vibration damped.

Airend

Genuine KAESER single-stage rotary screw airend with SIGMA PROFILE rotors and cooling-fluid injection for optimised rotor cooling.

Electric motor

German made high efficiency (IE2) electric motor to IP 54 and insulation class F for additional reserve.

V-belt drive

Maintenance-free elasticised V-belt. No adjustment necessary.

Fluid and air flow

Honeycombed dry-air filter, check valve at inlet, pneumatic vent valve, cooling fluid reservoir with dedicated separator cartridge, pressure release valve, minimum pressure/ check valve, microfilter in cooling fluid system.

Cooling

Air cooled; aluminium cooler for cooling fluid with separate fan motor, second fan on drive motor shaft. Automatic warm-up control (active only with very low load).

Air receiver

Internally coated, electronically controlled condensate drain.

SIGMA CONTROL BASIC

Measured data displayed: network pressure, shut-off pressure, airend discharge temperature. Status data displayed: system status, error alert, maintenance due. Also displayed: hours counter for service, on-load

and compressor run time, adjustable service interval, pressure and temperature unit selection (bar/ psi/ MPa, °C/°F). Adjustable nominal system pressure. Emergency-off switch, floating contact for motor running. Electronic pressure transducer.


Electrical components

Control cabinet to IP 54, automatic star-delta starter (from 3 kW); motor-overload protection; control transformer.

Refrigeration dryer

Equipped with stainless steel plate heat exchangers, integrated condensate separator, electronically controlled condensate drain, insulated refrigerant loop.

Component layout for SXC systems

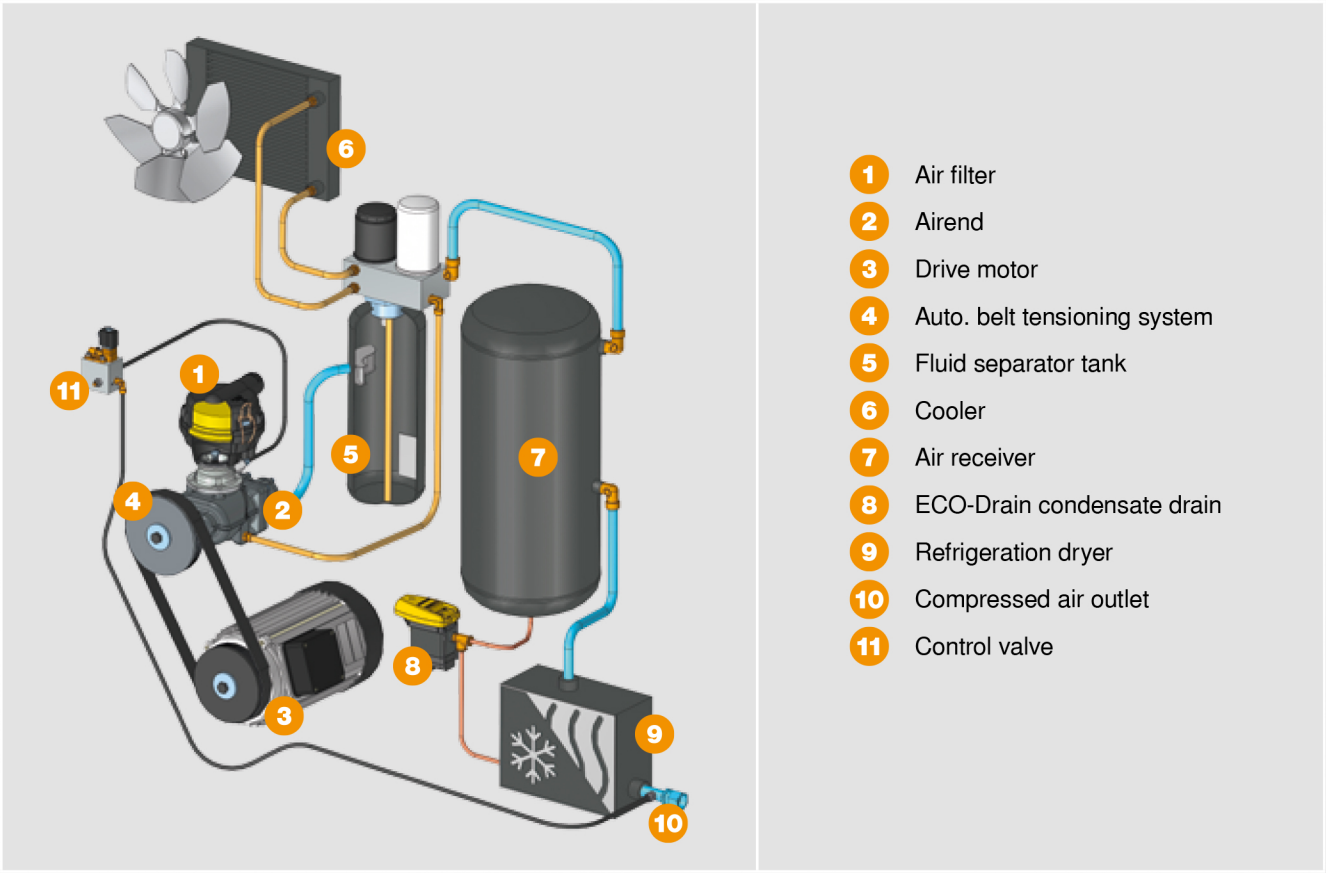

Technical Specifications

Model	Working pressure	FAD *) Complete package at working pressure	Max. operating pressure	Rated motor power	Refrigeration dryer power consumption	Refrigerant	Pressure dew point	Dryer differential pressure	Air receiver	Dimensions W x D x H	Sound pressure level **)	Weight
	bar	m³/min	bar	kW	kW		°C	bar	l	mm	dB(A)	kg
SXC 3	7.5 10	0.34 0.26	8 11	2.2	0.25	R 134 a	+6	0.2	215	620 x 980 x 1480	68	285
SXC 4	7.5 10 13	0.45 0.36 0.26	8 11 15	3.0	0.25	R 134 a	+6	0.2	215	620 x 980 x 1480	69	285
SXC 6	7.5 10 13	0.60 0.48 0.37	8 11 15	4.0	0.30	R 134 a	+6	0.2	215	620 x 980 x 1480	69	290
SXC 8	7.5 10 13	0.80 0.67 0.54	8 11 15	5.5	0.30	R 134 a	+6	0.2	215	620 x 980 x 1480	69	300

*) FAD complete system as per ISO 1217 : 2009, Annex C: absolute inlet pressure 1 bar (a), cooling and air inlet temperature 20 °C

**) Sound pressure level as per ISO 2151 and the basic standard ISO 9614-2, operation at maximum operating pressure; tolerance: ± 3 dB(A)


Views



Choose the required grade of treatment according to your field of application:

Air treatment using a refrigeration dryer (pressure dew point + 6°C)

Examples: Selection of treatment classes to ISO 8573-1 (2010)

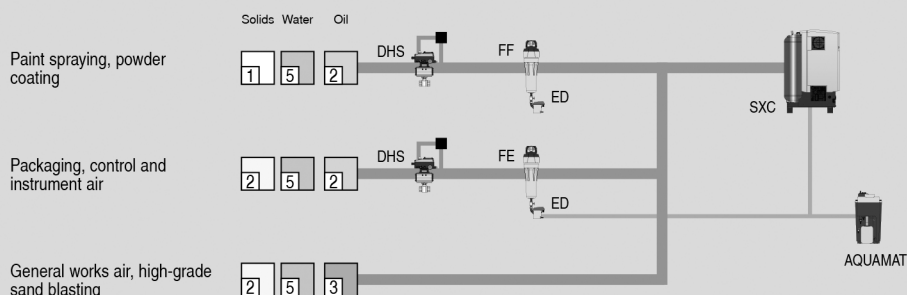

Explanation	
AQUAMAT	Condensate treatment system
DHS	Air-main charging system
ED	ECO DRAIN (condensate drain)
FE / FF	Microfilter

Compressed air quality classes to ISO 8573-1(2010):

Solid particles/dust			
Class	max. particle count per m ³ of a particle size with d in µm *		
	0.1 ≤ d ≤ 0.5	0.5 ≤ d ≤ 1.0	1.0 ≤ d ≤ 5.0
0	e.g. Consult KAESER regarding pure air and cleanroom technology		
1	≤ 20.000	≤ 400	≤ 10
2	≤ 400.000	≤ 6.000	≤ 100
3	Not defined	≤ 90.000	≤ 1.000
4	Not defined	Not defined	≤ 10.000
5	Not defined	Not defined	≤ 100.000
Class	Particle concentration C _p in mg/m ³ *		
	0 < C _p ≤ 5		
7	5 < C _p ≤ 10		
X	C _p > 10		

Water	
Class	Pressure dew point, in °C
0	e.g. Consult KAESER regarding pure air and cleanroom technology
1	≤ -70 °C
2	≤ -40 °C
3	≤ -20 °C
4	≤ +3 °C
5	≤ +7 °C
6	≤ +10 °C
Class	Concentration of liquid water C _w in g/m ³ *
7	C _w ≤ 0.5
8	0.5 < C _w ≤ 5
9	5 < C _w ≤ 10
X	C _w > 10

Oil	
Class	Total oil concentration (fluid, aerosol + gaseous) [mg/m ³] *
0	e.g. Consult KAESER regarding pure air and cleanroom technology
1	≤ 0.01
2	≤ 0.1
3	≤ 1.0
4	≤ 5.0
X	> 5.0

*) At reference conditions 20°C, 1 bar(a), 0% humidity

honiton office

AEP Ltd, Devonshire Road,
Heathpark,
Honiton, Devon, EX14 1SG

Phone: +44 (0)1404 548 000
E-mail: sales@aep-ltd.co.uk

ringwood office

AEP Ltd, Unit 3, Pintail Business Park,
165 Christchurch Road
Ringwood, Hampshire, BH24 3AL

Phone: +44 (0)1425 474 967
E-mail: sales@aep-ltd.co.uk

plymouth office

AEP Ltd, Mill Close,
Lee Mill Industrial Estate, Ivybridge,
Plymouth, Devon, PL21 9GL

Phone: +44 (0)1752 893 890
E-mail: sales@aep-ltd.co.uk